
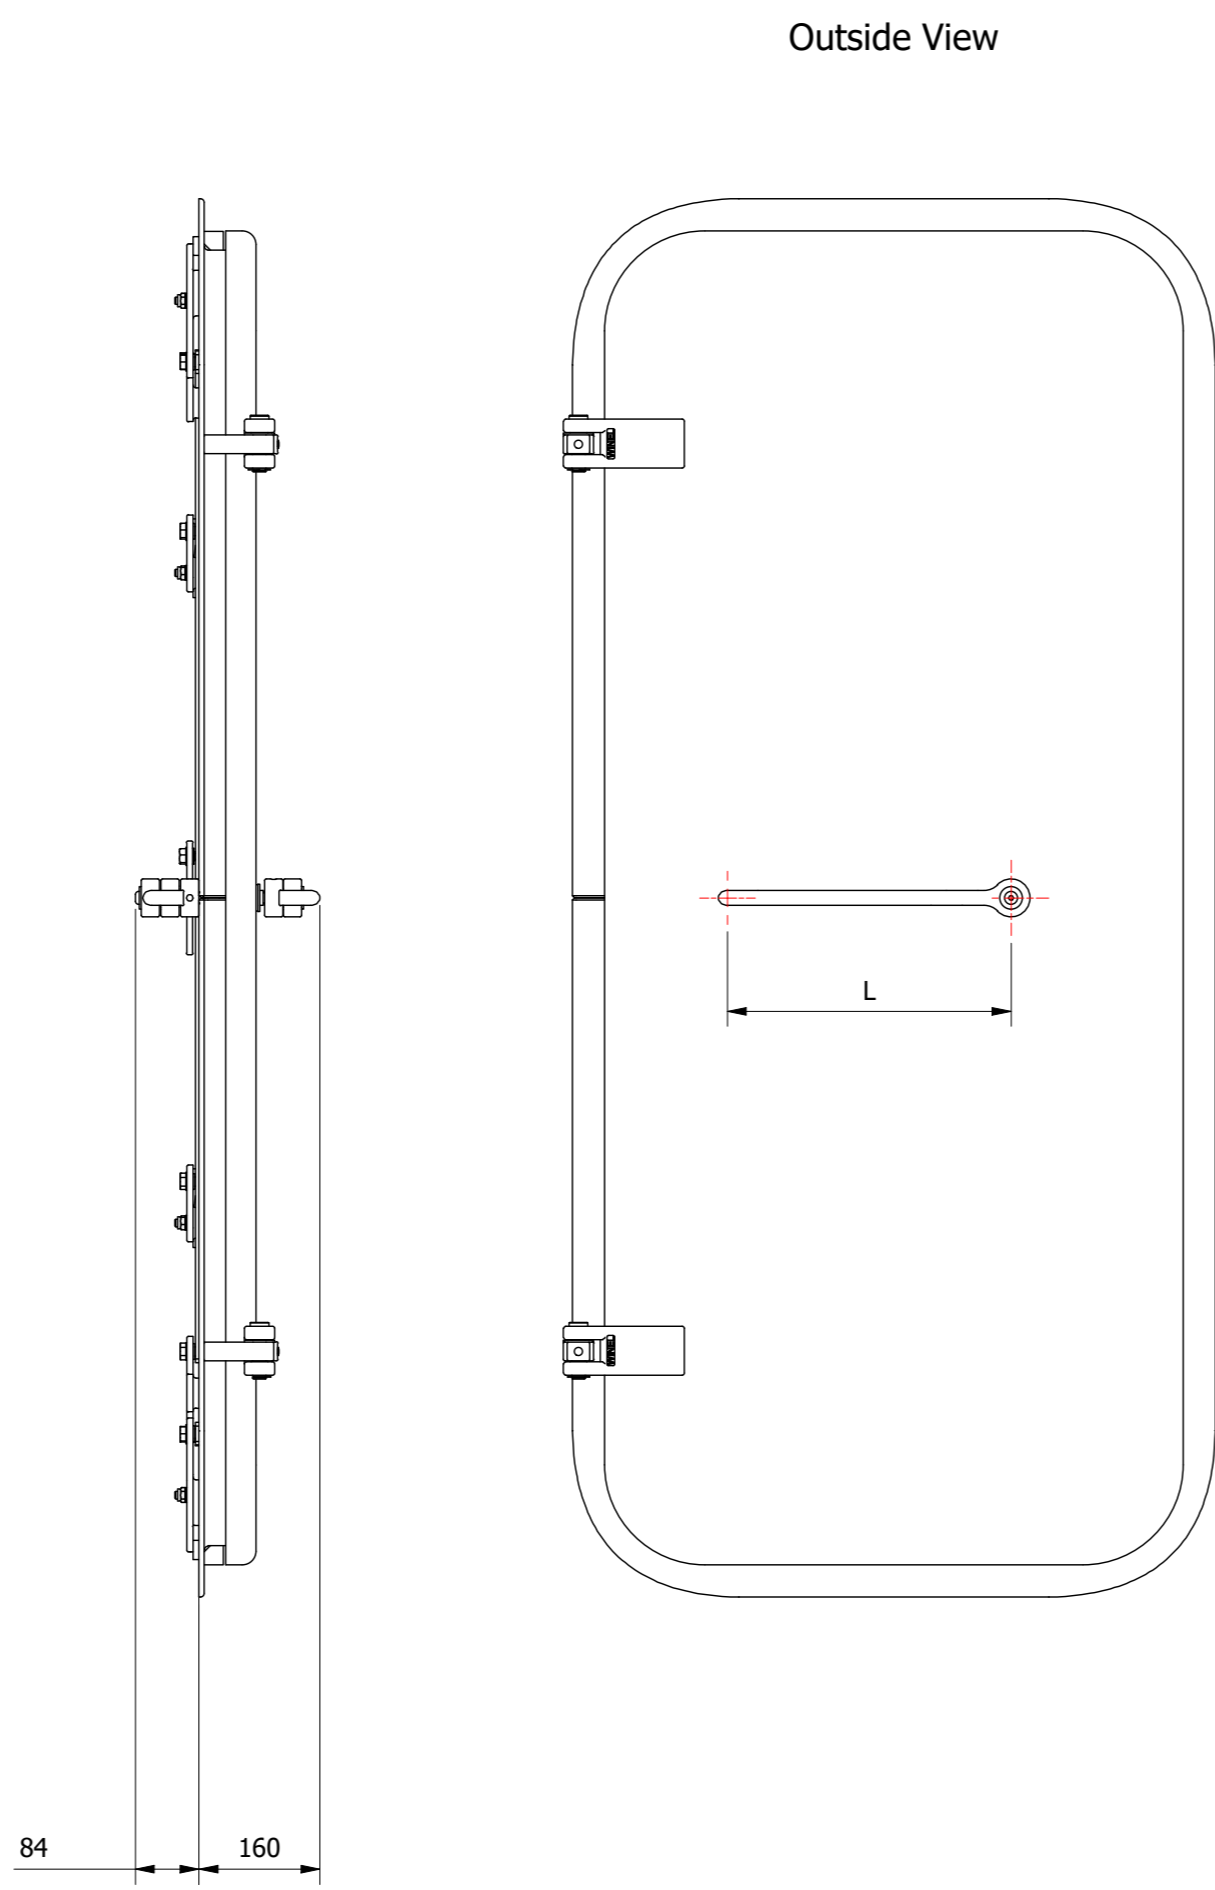
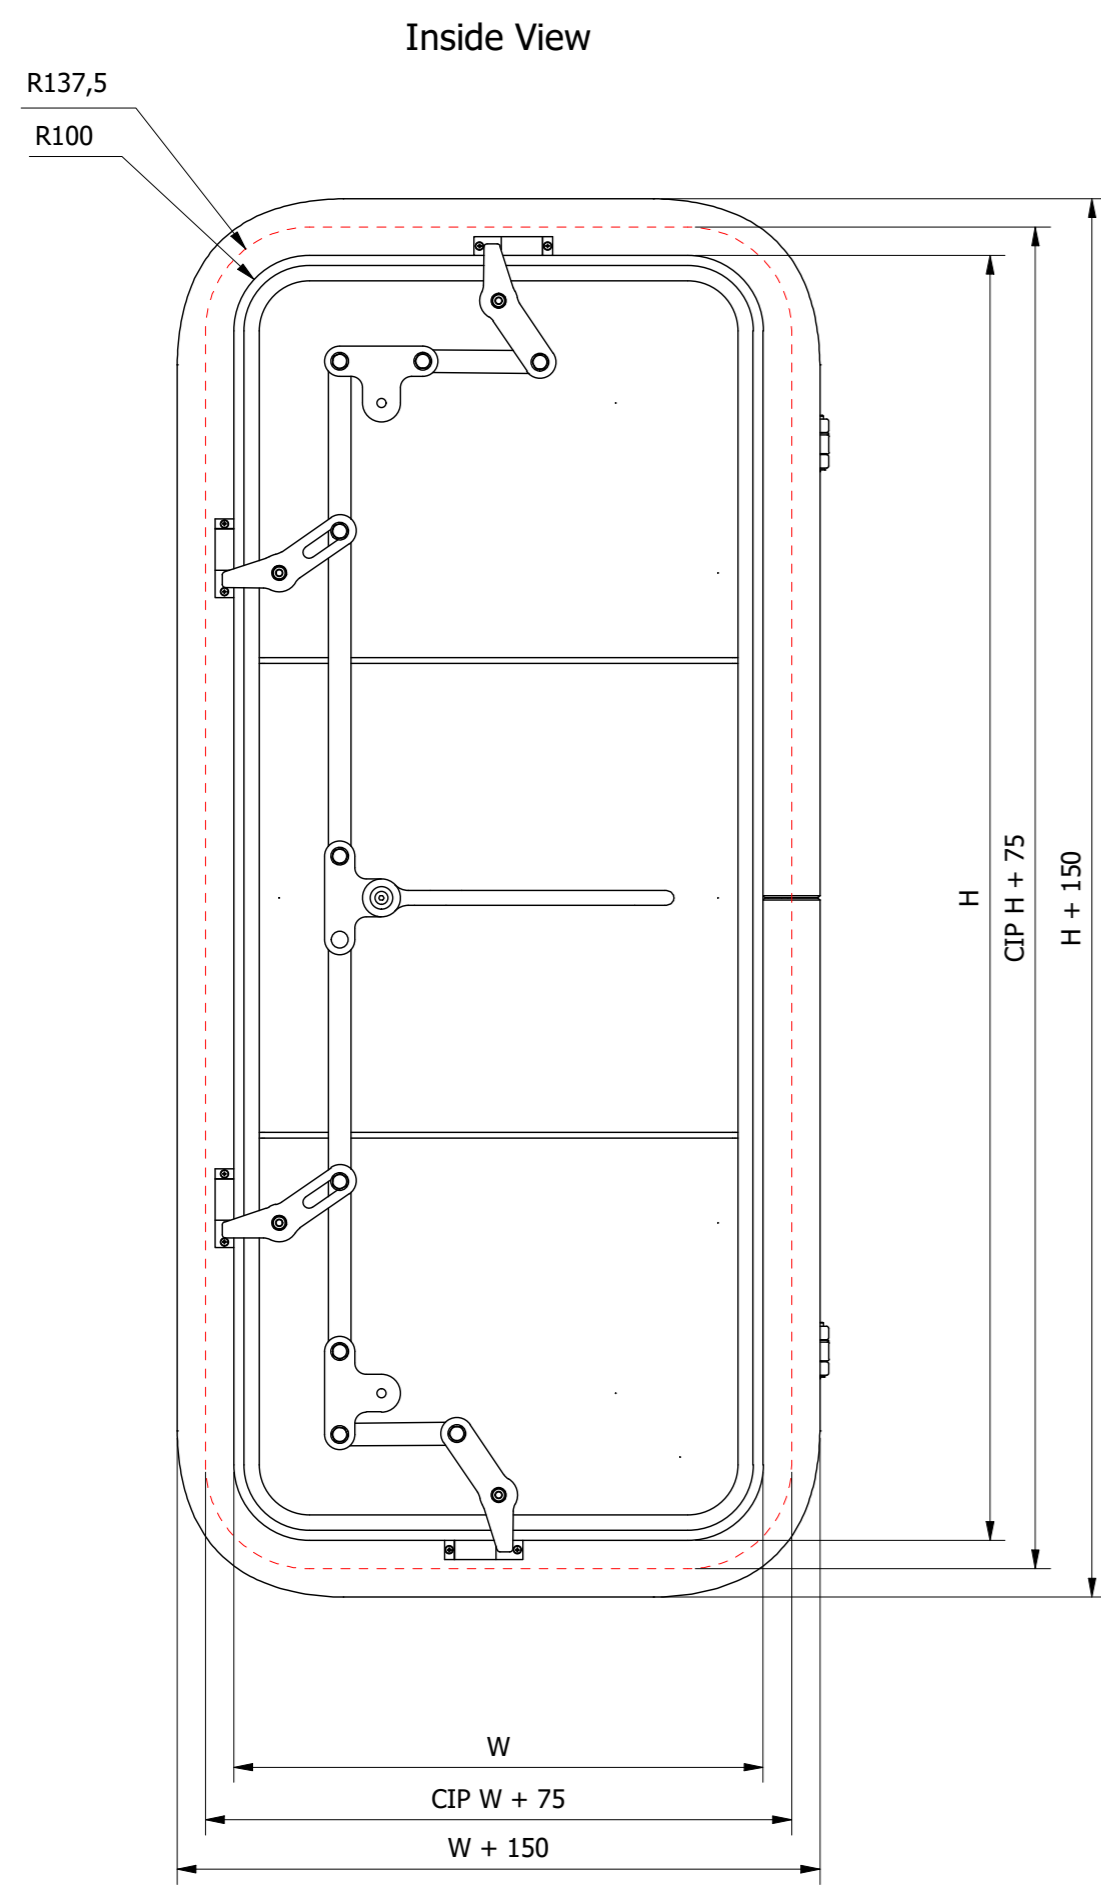


- Doorplate: Grade A / Aluminium / Stainless Steel ; 8 mm
- Coaming: 75x50x7 Steel / Aluminium / Stainless Steel
- Cleats: Cast stainless steel: 1.4408 / ATSM CF8M equivalent to 1.4404 / AISI 316
- Mechanism: Stainless Steel 1.4404 / AISI 316L
- Seal: Seal 42.5x20.4 EPDM
- Wedge: Brass / POM
- Hinge: Stainless Steel or Aluminium with Orkot® bearing and Stainless Steel Axle
  
- Insulation : Rockwool Marineslab 55 or FireMaster Marine Plus Blanket :40mm / 70 kg m<sup>3</sup>
  
- Clear Opening: H x W
- Cut in plate: H + 75 x W + 75
- Outside dimensions: H + 150 x W + 150
- Handle length: L =375

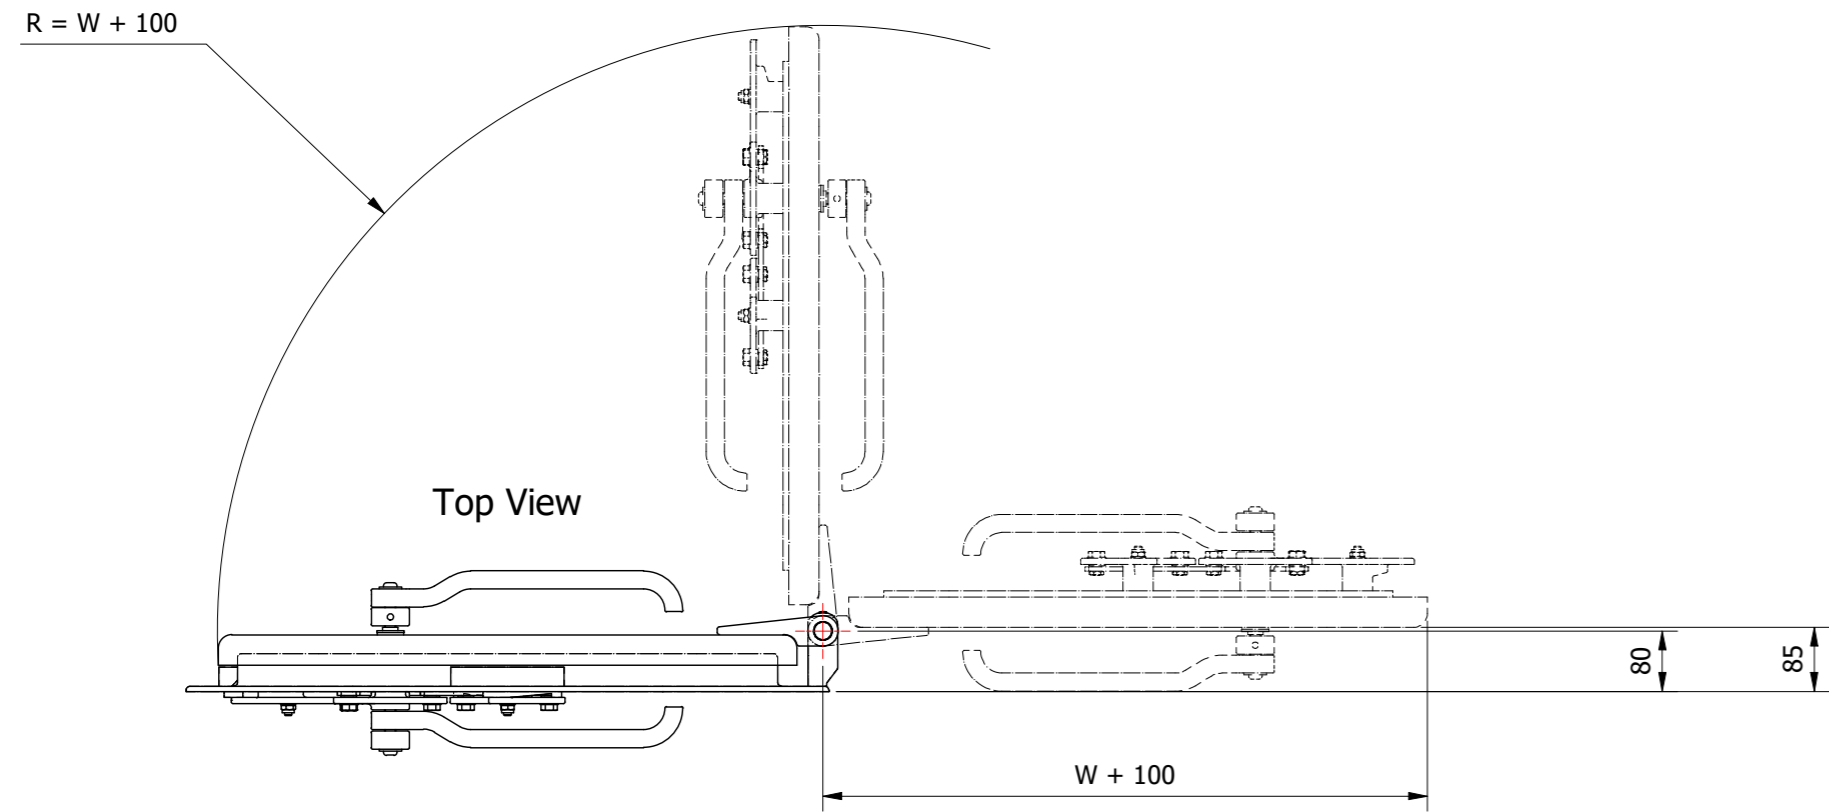

|   |   |           |          |          |
|---|---|-----------|----------|----------|
|   |   | RM        | 5-2-2021 | -        |
| Revision Description  |   | Name      | Date     | Rev      |
|   |   | Status:   | Released |          |
|   |   | Engineer: | RM       | 5-2-2021 |
| American projection:  | Description:<br><b>WET Musketeer Door, 4 cleats, LH</b> |           |          |          |
| Reference: Winel product catalog  |   |           |          |          |
| Drawing number:<br><b>9542.2 XXXX</b>   |   |           | Rev.     | Sheet    |
|   |   |           | -        | 1 / 1    |
|   |   |           | Size     | A2       |
| Dr. A.F. Philipsweg 55<br>9403 AD Assen<br>The Netherlands<br>info@winel.nl<br>www.winel.nl<br>+31 (0)592 366 060                         |   |           |          |          |
| The drawing and design shown is our property and may not be used or disclosed for any third person without our specific written approval. |   |           |          |          |